



DDR SDRAM REGISTERED DIMM MODULE, 2.5V 1GByte - 128MX72 AVM7228R38C3400K4

FEATURES

- JEDEC DDR PC-3200 400MHz Version 1.0
- Clock frequency: 200MHz with CAS latency 3
- 8K refresh per 64ms
- 256 byte serial EEPROM
- Low active and standby current consumption
- Data input and output masking
- SSTL-2 compatible inputs and outputs
- Programmable burst length: 2, 4, 8
- Decoupling capacitors at each memory device
- Programmable burst type: sequential and interleave
- Double-sided module
- Programmable CAS latency: 3
- 1.20 inch height
- Auto refresh and self refresh capability
- Gold card edge fingers


DESCRIPTION

The AVM7228R38C3400K4 is a Registered DDR SDRAM DIMM module. This module is JEDEC Pinout compatible DDR SDRAM Registered DIMM. The module has all the addresses and control signals buffered to reduce capacitive loading. The module utilizes a phase lock loop to reduce the capacitive loading on the clock signals and to synchronize all SDRAM input clocks with the system clock. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVM7228R38C3400K4 memory module is 1GByte and organized as 128MX72 ECC array using (36) 64MX4 DDR SDRAMs in BGA packages.

The module PCB is fabricated using the latest technology design, eight-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

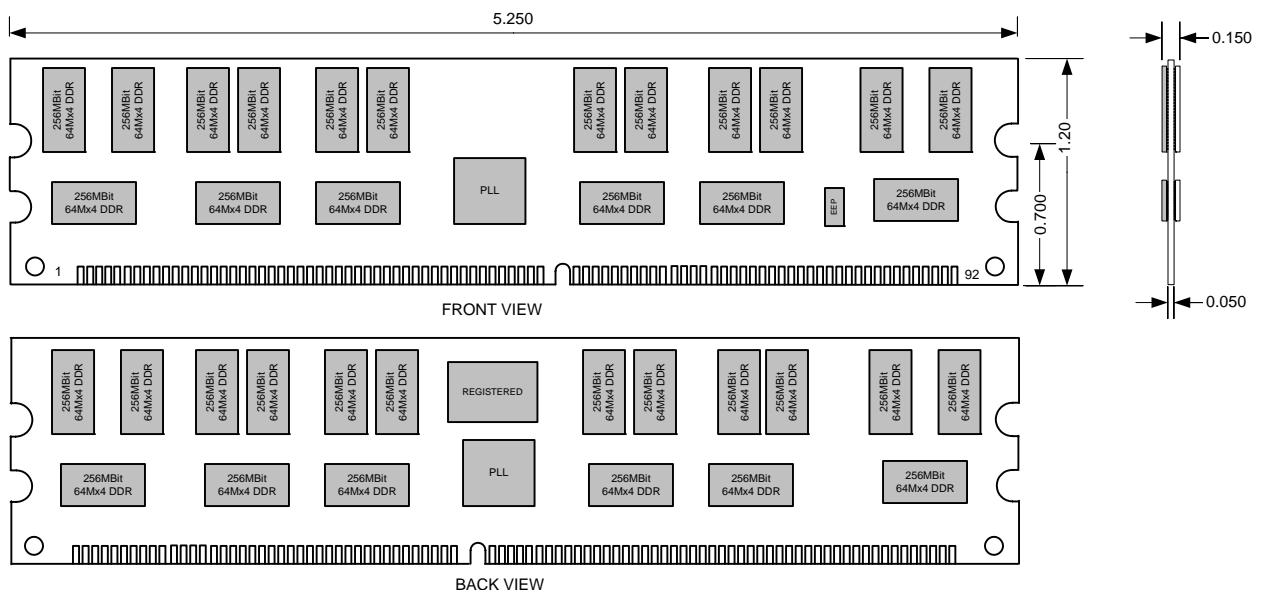

Avant Ordering Guides

INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
AV=AVANT	M = 184-PIN DDR DIMM	72=X72	28=128M	R= REGISTERED	38 = 16Mx4x4 (8K)	C = 2.5V	3 = CAS LATENCY 3	400MHZ	K=DDR SDRAM	REV=4

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.