



DDR2 SDRAM SO-DIMM MODULE, 1.8V 2GByte - 256MX64 AVK6456U61E5800F2-AP

FEATURES

JEDEC Standard DDR2 PC2-6400 800MHz, Lead Free, RoHS compliant

- Clock frequency: 400MHz with CAS latency 5
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 2, 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 5
- Auto refresh and self refresh capability
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- SSTL-2 compatible inputs and outputs
- Decoupling capacitors at each memory device
- Double-sided module
- 1.18 inch height


DESCRIPTION

The AVK6456U61E5800F2-AP family consists of Unbuffered DDR2 SDRAM SODIMM memory module. This module is JEDEC-standard 200-pin, small-outline, dual in-line memory module. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVK6456U61E5800F2-AP memory module is 2GByte and organized as a 256MX64 array using (16) 128MX8 (4 internal banks) DDR2 SDRAMs in lead-free BGA packages.

All memory modules are fabricated using the latest technology design, eight-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

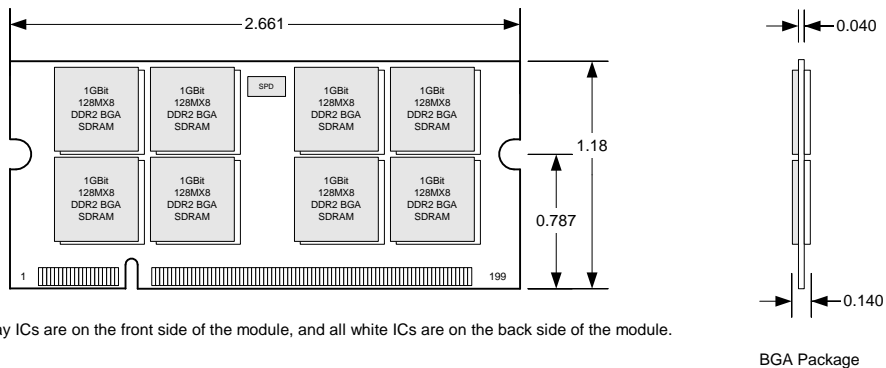

Avant Ordering Guides

INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
Av = AVANT	K = 200-PIN SO-DIMM	64=X64	56=256M	U=UNBUFFERED	61 = 16Mx8x8	E = 1.8V	5 = CAS LATENCY 5	800 MHZ	F=DDR2 SDRAM	REV=2

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.