

FULLY BUFFERED LOW POWER DIMM MODULE,1.5V
2GByte DDR2- 256MX72
AVF7256B61F5800F0-AP



FEATURES

JEDEC DDR2 fully buffered (FBDIMM) with ECC PC2-6400 800MHz, Lead Free, RoHS compliant


- Clock frequency: 400MHz with CAS latency 5
- Very low-power DDR2 operation
- 256 byte serial EEPROM
- SMBus interface to AMB for configuration register access
- In-band and out-of-band command access
- Automatic DDR2 SDRAM bus and channel calibration
- Programmable CAS latency: 5
- High speed, differential, point-to-point link
- Transmitter de-emphasis to reduce ISI
- MBIST and IBIST test functions
- Channel error detection and reporting
- 8K refresh per 64ms
- Gold edge contacts
- Double-sided module
- 30.35mm (1.195 inch) height

DESCRIPTION

The AVF7256B61F5800F0-AP is a fully buffered DDR2 SDRAM DIMM module. This module is JEDEC Pinout compatible DDR2 SDRAM Buffered DIMM with heatsink spreader. The module consumes less power than the standard 1.8V FBDIMM. This module can be powered on at 1.8V for up to 100ms for system initialization and module voltage configuration. It provides a high memory bandwidth, large capacity channel solution that has a narrow host interface. The module utilizes commodity DRAMs isolated from the channel behind a buffer on the DIMM. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc. The AVF7256B61F5800F0-AP memory module is 2GByte and organized as 256MX72 ECC array using (18) 128MX8 DDR2 SDRAMs in lead-free, FBGA packages.

The module PCB is fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

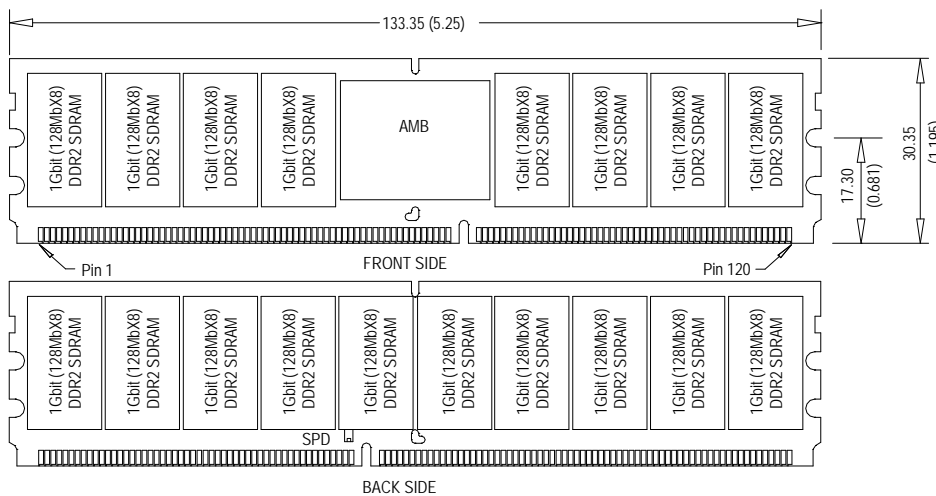

NOTES: 1- All dimensions are in millimeters (inches)
 2- The dimensional drawings are for reference only. Refer to the JEDEC document for additional information.

Avant Ordering Guides

AV	F	72	56	B	61	F	5	800	F	0
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
AV=AVANT	F=240-PIN DDR2 DIMM	72=X72	56=256M	B=BUFFERED	61 = 16Mx8x8 (DDR2 SDRAM)	F = 1.5V	5 = CAS LATENCY 5	800MHZ	F=DDR2 SDRAM	DEF=0

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.