



# DDR2 SDRAM REGISTERED DIMM MODULE, 1.8V

## 512MByte - 128MX72

### AVF7264R52E5667F3-AP

### FEATURES

JEDEC DDR2 PC2-5300 667MT/s, Lead Free, RoHS compliant

- Clock frequency: 333MHz with CAS latency 5
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 2, 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 5
- Auto refresh and self refresh capability
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- SSTL-2 compatible inputs and outputs
- Decoupling capacitors at each memory device
- Double-sided module
- 18.29 mm (0.72 inch) height


### DESCRIPTION

The AVF7264R52E5667F3-AP is a VLP (Very Low Profile) Registered DDR2 SDRAM DIMM module. This module is JEDEC MO-237 R/C R DDR2 SDRAM Registered DIMM. The module has all the addresses and control signals buffered to reduce capacitive loading. The module utilizes a phase lock loop to reduce the capacitive loading on the clock signals and to synchronize all SDRAM input clocks with the system clock. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVF7264R52E5667F3-AP memory module is 512MByte and organized as 64Mx72 ECC array using (9) 64Mx8 DDR2 SDRAMs in lead-free FBGA packages.

The module PCB is fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

### PHYSICAL DIMENSIONS

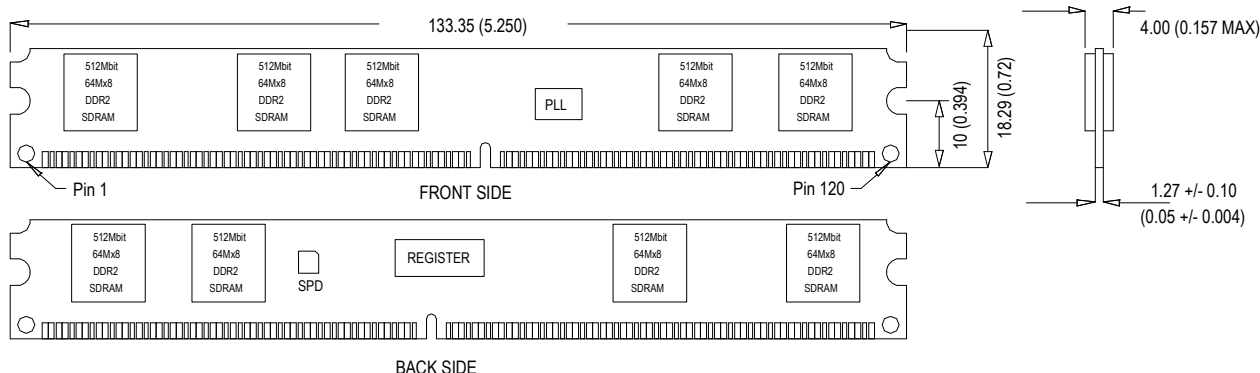

NOTES: 1- All dimensions are in millimeters (inches)  
 2- The dimensional drawings are for reference only. Refer to the JEDEC document for additional information.

**Avant Ordering Guides**

<b>AV</b>	<b>F</b>	<b>72</b>	<b>64</b>	<b>R</b>	<b>52</b>	<b>E</b>	<b>5</b>	<b>667</b>	<b>F</b>	<b>3</b>
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
AV=AVANT	F=240-PIN DDR2 DIMM	72=X72	64 = 64M	R=REGISTERED	52 = 16Mx8x4 (DDR2 SDRAM)	E=1.8V	5 = CAS LATENCY 5	667MT/s	F=DDR2 SDRAM	REV=3

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.