



DDR SDRAM DIMM MODULE, 2.5V 256MByte - 32MX72 AVM7232U39C5266K0

FEATURES

JEDEC DDR PC-2100 266MHz Version 1.0

- Clock frequency: 133MHz with CAS latency 2.5
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 2, 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 2.5
- Auto refresh and self refresh capability
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- SSTL-2 compatible inputs and outputs
- Decoupling capacitors at each memory device
- Double-sided module
- 1.25 inch height


DESCRIPTION

The AVM7232U39C5266K0 is a 184 pin Unbuffered DDR SDRAM DIMM memory module. This module is JEDEC Pinout compatible. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVM7232U39C5266K0 memory module is 256MByte and organized as 32MX72 array using (9) 32MX8 DDR SDRAMs in TSSOP II packages.

This memory module is fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

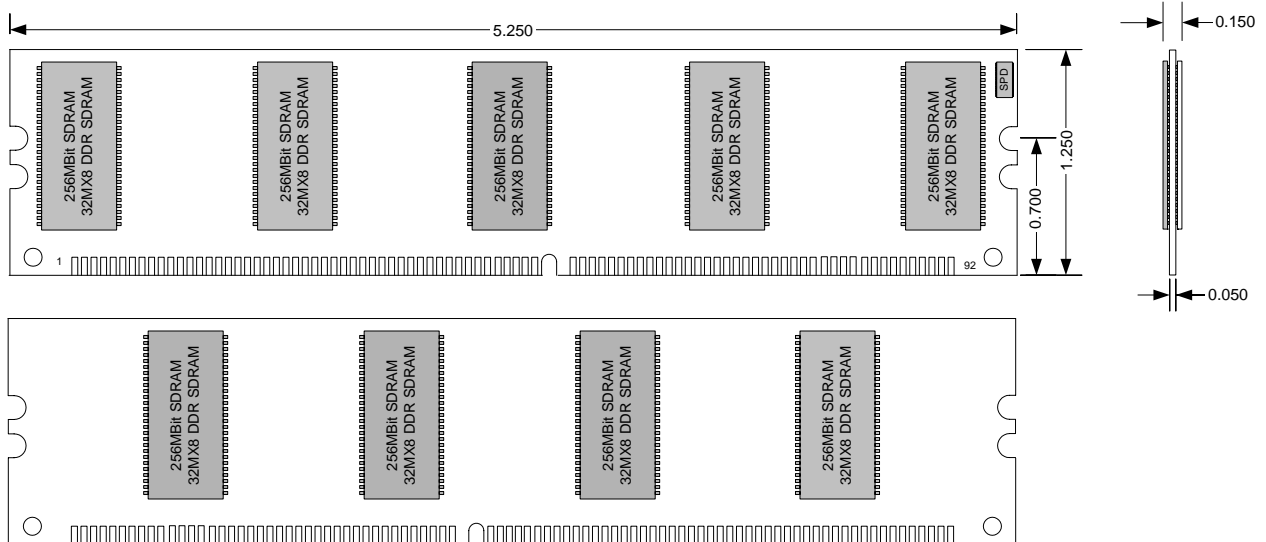

Avant Ordering Guides

AV	M	72	32	U	52	C	5	266	K	0
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
AV = AVANT	M=184-PIN DDR DIMM	72=X72	32 = 32M	U=UNBUFFERED	39 = 8mX8X4 (DDR SDRAM)	C = 2.5V	5 = CAS LATENCY 2.5	266MHZ	K-DDR SDRAM	DEF=0

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.