



DDR2 SDRAM UNBUFFERED DIMM MODULE, 1.8V 512MByte - 64MX72 ECC AVF7264U52E4533F1

FEATURES

JEDEC DDR2 PC2-4200 533MHz

- Clock frequency: 266MHz with CAS latency 4
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 4
- Bi-directional Differential Data-Strobe
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- On Die Termination
- Auto refresh and self refresh capability
- Single-sided module
- 1.20 inch height


DESCRIPTION

The AVF7264U52E4533F1 is an Unbuffered DDR2 SDRAM DIMM module. This module is JEDEC Pinout compatible DDR2 SDRAM Unbuffered DIMM. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVF7264U52E4533F1 memory module is 512MByte and organized as 72MX64 array using (9) 64MX8 DDR2 SDRAMs in FBGA packages.

The module PCB is fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

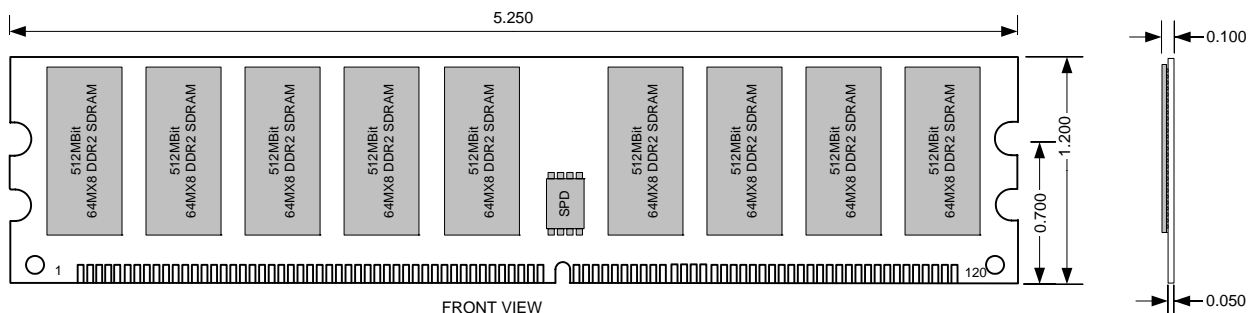

Avant Ordering Guides

AV	F	72	64	U	52	E	4	533	F	1
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
AV=AVANT	F=240-PIN DDR2 DIMM	72=x72	64 = 64M	U = Unbuffered	52 = 16Mx8x4 (DDR2 SDRAM)	E=1.8V	4 = CAS LATENCY 4	533MHZ	F=DDR2 SDRAM	REV=1

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.